



# One Stop Shopping for the Body Shop Industry



888-777-4450

[www.CEGGroup.com](http://www.CEGGroup.com)



We are very proud to present to you our 2008-2009 Collision Equipment Group Annual Catalog. Our goal is to provide you with a deeper look at over 20,000 items from over 30 product lines that CEG represents. With such a deep and varied product offering, it was extremely difficult to decide which products would be presented to you in the catalog. If you don't see exactly what you are looking for here, please go to our website at [www.CEGroup.com](http://www.CEGroup.com) for a more complete listing of products.

The Collision Equipment Group is made up of several people you already know. Our distributor members are all experienced, customer oriented equipment professionals that believe in ensuring that our customers receive excellent, personal attention before, during, and after the sale.

CEG is extremely proud to be the exclusive distributor of automotive frame repair equipment from R.G. Grabber Inc., Auto Body Collision Repair Equipment Division. Grabber's extensive line of Made in America frame systems are designed to meet the needs of any shop in the market. From their automotive systems up to their line of heavy duty truck systems, superior quality and performance has separated Grabber in the industry for over 35 years. Grabber also offers a comprehensive selection of specialty clamping, tools and accessories of which many have been patented.

Another exciting addition to CEG is the AMH Canada LTD welding products. CEG is now the US Master Distributor and National Service Center for all AMH auto body products. AMH is known throughout the industry as a manufacturer of high quality products with the latest technology. Their CompuSpot resistance spot welders, UltraMig synergic MIG welders, SpectraTek lamps and paint curing systems are innovative systems that provide value for the technicians and the body shop.

As waterborne paints become more popular, we are searching for the most innovative equipment that will allow you to produce the best results. Two companies that are leading the way are B Tec North America and Meech USA. B Tec is an award winning developer of spray gun cleaning equipment. Their stainless steel gun washing equipment allows the flexibility to be set up for waterborne or solvent cleaning. Meech's SpeedDri System mounts in your paint booth and provides fast and efficient drying of waterborne paint. The SpeedDri System is perfect for those who want the performance of air movers without the clutter of air lines and stands in their booth.

It is an honor to welcome DJS Fabrications and Eagle Manufacturing Company to CEG. DJS's new Universal Vehicle Dolly System makes moving vehicles safe and easy from the parking lot, through the shop, and onto your lift or frame equipment. Eagle has over 100 years of manufacturing and is a leader in flammable material safety cabinets.

We hope that you find that our distributors, vendors, website, and this catalog shows why we feel we are One Stop Shopping for the Body Shop Industry.

Pictures and drawings are for illustration only. Prices subject to change without notice. Shipping and C.O.D. charges not included. All items are covered by their respective manufacturer's warranties. The Collision Equipment Group, Inc. offers no warranty outside of those warranties provided by the manufacturers. State and local taxes may apply. The Collision Equipment Group, Inc. is not responsible for typographic or photographic errors or for errors in prices or specifications. Products, prices and promotions may change without notification. All prices in USD.

# Index

## Measuring

Touch	2,3
Touch Wheels	4
Mega Tram & Mo Clamp 7400	5

## Frame Straightening

Spanesi	6-9
ProlineXL	10,11
Winner	12,13
Pacesetter	14
MegaTek	15
Grabber Optional Accessories	16,17
Body Loc BL76T & BL27C	18
Quadra Block Truck Clamps	19
Stanzani	20
Mo Clamp	21-23
BVA & Porto-Power	24

## Lifts/Jacks

Norco	25
Eagle Equipment	26,27
Omega	28
Selson Air Jacks & Rak Jak	29
DJS Fabrications	30
Go Jak & Body Loc BL90MV Jr.	31

## Welding/Dent Pulling

CompuSpot	32-34
ARC 1250 & 1050	35
ARC 1000DX & Dent Fix Multi Pull	36
UltraMig	38,39
Dent Fix Spot Welder, Boron Bit & Weld Blanket	40,41

## Rack/Stands/Carts

Dar-A-Con	42,43
Innovative Tools	44,45

## Gun Washers/Solvent Recyclers

B-Tec	46-48
Becca	49

## Paint Curing

Spectra Tek	50,51
Meech	52,53

## Paint Booth Accessories

LDPI Lighting	54
---------------	----

## Storage/Work Stations

Eagle Cabinets	55
----------------	----

## Service Equipment

Yellow Jacket	56,57
---------------	-------

## Compressed Air

Champion	58,59
RTi	60,61

# TOUCH

## Measuring



**Touch** lets you measure parts, off the vehicle before installing them.

**Touch** can be used under any circumstance, noise and air currents do not affect the operation of the system.

**Touch** versatility allows you to measure and document hundreds of under and upper body points.

**Touch** shows you which way to pull and you can monitor the pull as you correct the damage.

**Touch** provides full upper body capability.

**Touch** sets up fast, measures in minutes and lets technicians monitor pulls while repairing damaged vehicles.

**Touch** lets you measure anywhere on the vehicle with only six (6) accessories.

**Touch** lets you diagnose and repair the damage.

**Touch** printouts certify the pre- and post- repair dimensions. Printouts that satisfy insurance company requirements.

**2**

**888-777-4450**





## Measuring

**Touch** has over 7,000 vehicles in its database going back to 1994. Data can also be created for custom vehicles and applications.

**Touch** offers more features with fewer parts than any other system on the market.

**Touch** ensures overall quality of the repair— you avoid redos and come backs and it provides you a way to consistently turn out quality work.



**The Touch Advantage**  
**Easy to Use**  
**Can be Easily Moved Around the Shop**  
**Vehicle Can Be Measured on the Floor**  
**Use on your Rack, Bench or the Floor**  
**Profit built In At The Beginning of the Job**  
**It will make you MONEY!**



[www.CEGroup.com](http://www.CEGroup.com)

3

# TOUCH

Measuring

## TOUCH WHEELS



Touch Wheels is the first system in the world to carry out vehicle wheel alignment without the need of a lift or the fixing of wheel clamps and measuring heads. This unique system allows an operator to achieve a computerized wheel alignment with printout in record time.

### Advantages:

- No need to fix wheel clamps on rims eliminating the possibility of damaging the wheel
- Wheel Alignment can be carried out with the vehicle directly on the ground
- The same instrument can be used for a full underbody alignment printout
- Simple and affective report with color icons
- Toe, camber and castor result in degrees
- Capability to store customer data and record type wear eliminating future comebacks
- Full diagnosis of damaged mechanical components including subframes, shock absorbers, hubs, etc.

A Touch Electronic Measuring System is required.  
Vehicle specifications sold separately.




4

**888-777-4450**

## Mega Tram Gauge Set

Measuring

Easy to read measurements in the analog display window

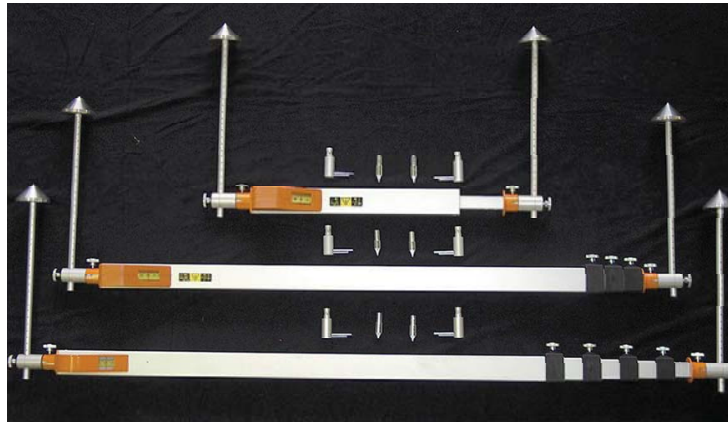

SHORT—	415—925 MM (16.3—36.4 in)
INTERMEDIATE—	920—2600 MM (36.2—102.3 in)
LONG—	950—3250 mm (37.4—127.9 in)



This package includes #7001 Universal Tram Gauge, #7200 Deluxe Centerline Gauge, #7300 Strut Tower Alignment Gauge, display board and hooks. Be sure to use your unibody and chassis dimension and specification charts.

[www.CEGroup.com](http://www.CEGroup.com)

5






## SPANESI MINI BENCH MAXIPLUS

### Frame Straightening

The Mini Bench MaxiPlus is the perfect choice for an in bay lifting and pulling system. This floor mounted unit can lift up to 6,600 lbs and pull a hefty 6 tons.

- Lowers Flat to the Floor
- 6,600 lbs Lifting
- Quick Repair Center
- Pulling Capability
- Electric Hydraulic
- Ideal with the Touch System
- Full Frame or Unibody
- Ideal for Diagnosis
- Increases Productivity
- Lift in Every Stall

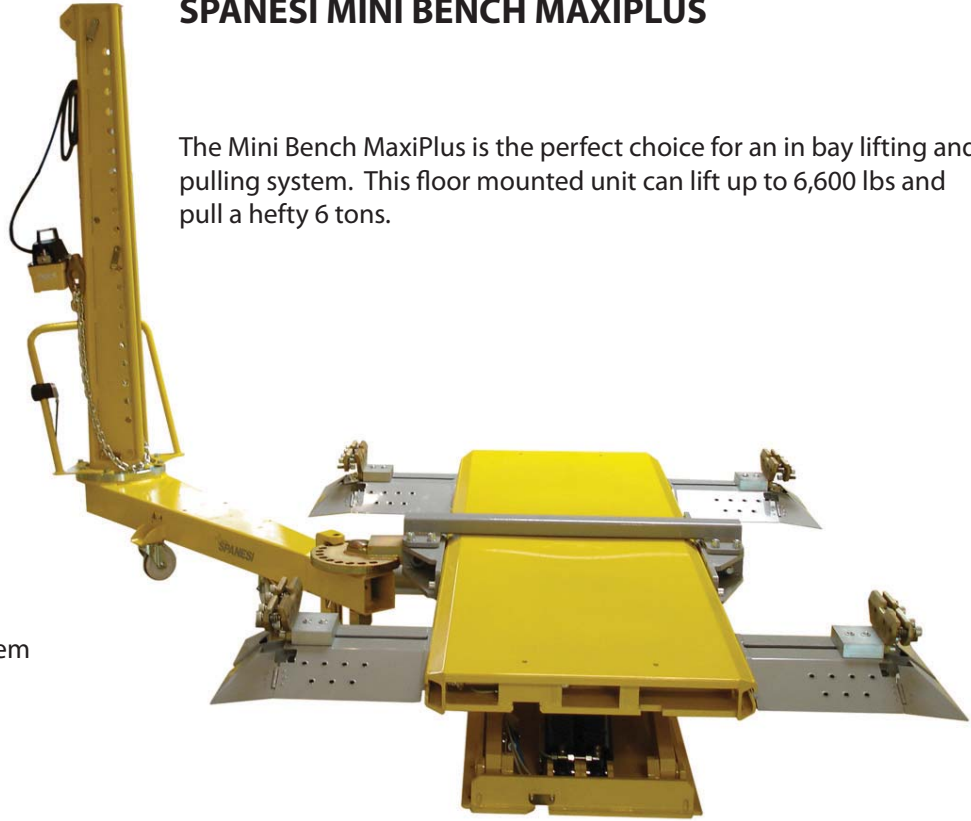

Deck Length (s)	7' 6"
Deck Width	4' 2"
Max Length	20' 6" w/ pulling arm
Max Width	12' 5" w/ pulling arm
Deck Height	
Variable	4.5" to 5'3"
Pulling Power	6 Tons
Lift Capacity	6,600 lbs



Designed to be used with the TOUCH Measuring system

6

**888-777-4450**



## SPANESI PONY BENCH BT Plus

**Frame  
Straightening**

If you are looking for the maximum use of your floor space, the Pony Bench BT Plus is what you are looking for. This system is a pit mounted system that retracts completely into the floor.

The automatically opening arms can be used with the rubber pads or the optional pinch weld clamps.



- The PONY BENCH BT PLUS allows to positioning or to fix the vehicle quickly thanks to the automatic opening of the arms.
- The user is able to work with the maximum comfortable and accessibility to the vehicle, because it has a raising of lifting of 1420 mm.
- It's an excellent straightening bench for the quick reparations, without moving the vehicle during the different processing phases.
- Working with the PONY BENCH BT PLUS and with the electronic measurement system TOUCH, it becomes a very comfortable diagnosis, reparation and certification Center.

Deck Length	7'3"
Deck Width	4'8"
Max Length	20'3"
Max Width	12'6"
Lift Max Height	87"
Lifting Capacity	6,600 lbs

[www.CEGroup.com](http://www.CEGroup.com)


7



## Series 100-T Unibody / Full Frame On Wheels With or Without Lift

**Frame  
Straightening**

The Series 100-TS Bench Systems is an excellent choice for the foundation of your bench system. An 11,000 lb lifting capacity pantograph lift with a lifting height of 5 feet comes standard with your system. Grow your 100-TS with the addition of the optional clamp kit for full frame vehicles.

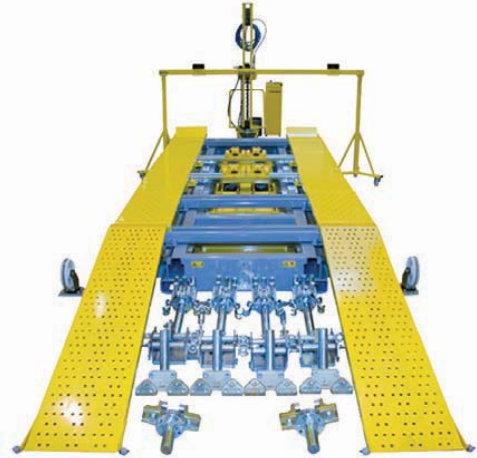


- Build your own system starting with a Bench on Wheels for Unibody repairs adding Full Frame capabilities at any time.
- Not only is the Universal jig system available for the 100-T Bench System it is available for many other competitive Bench Systems.
- 10 Ton Pulling Columns and or Vector Pulling are optional as is the Pantograph Lift.

Deck Length (s)	13' 3.5", 16'5"
Deck Width	3'5"
Max Length	16'5"
Max Width	8'3"
Deck Height	
Variable	1'4" to 5'
Pulling Power	6 Tons
Lift Capacity	11,000 lbs

**8**

888-777-4450

## SPANESI SUPERSTAR

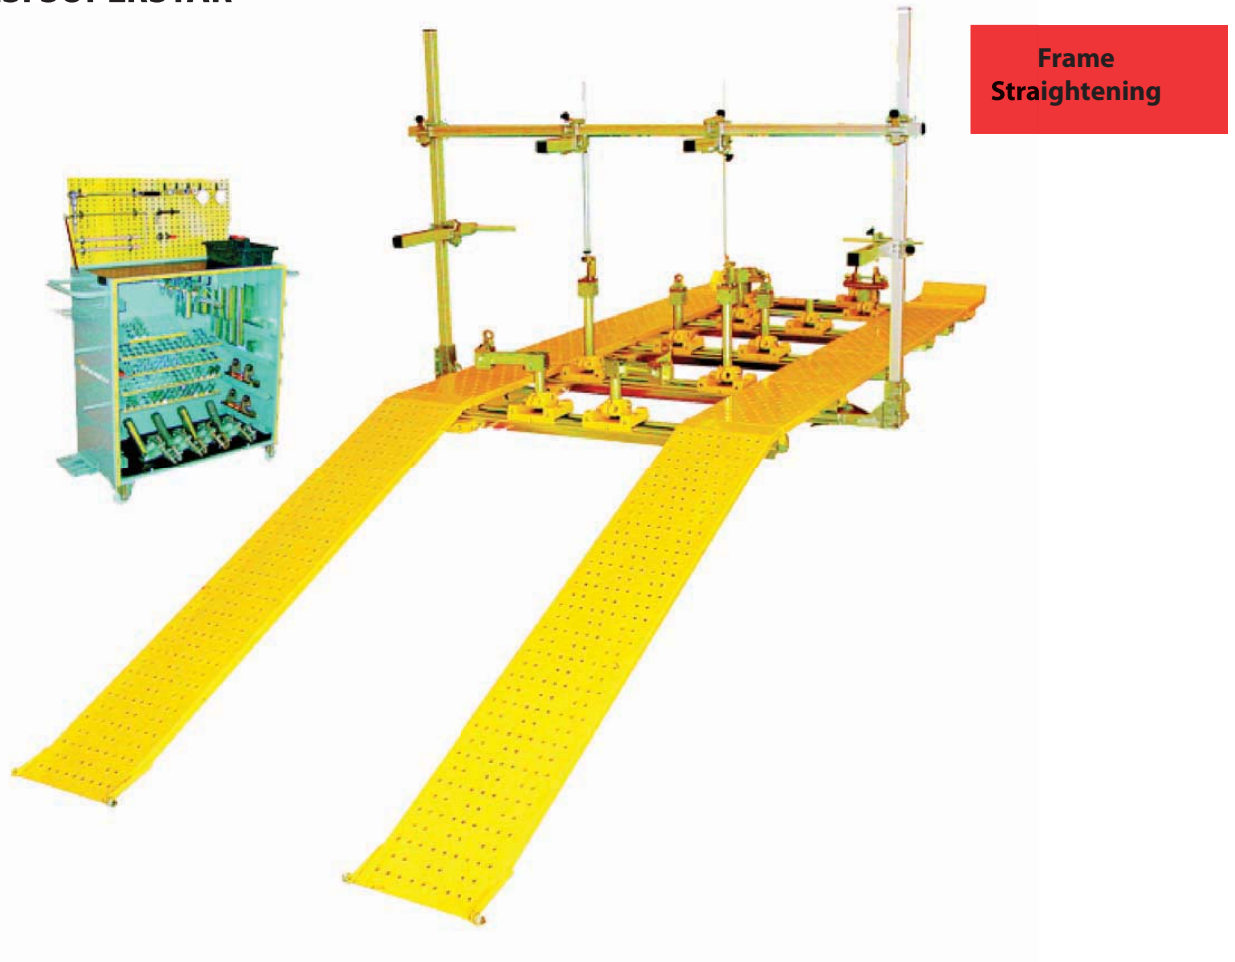


The Superstar Universal Jig System will allow you to convert any dedicated fixture bench to a universal jig system bench with a drive on capability. The system includes the Superstar jigs, two drive on ramps and 5 positioning platforms.

[www.CEGGroup.com](http://www.CEGGroup.com)

# ProLineXL

## Frame Straightening

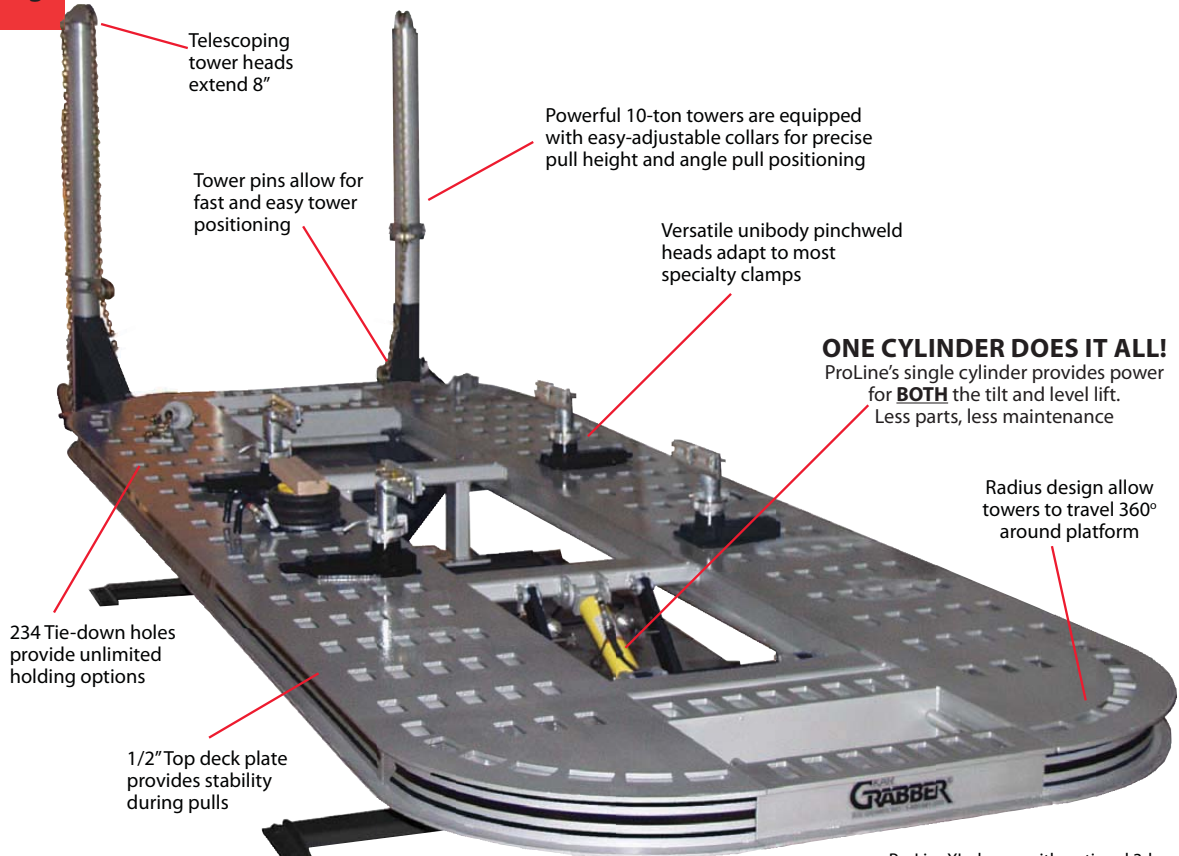

Telescoping tower heads extend 8"

Tower pins allow for fast and easy tower positioning

Powerful 10-ton towers are equipped with easy-adjustable collars for precise pull height and angle pull positioning

Versatile unibody pinchweld heads adapt to most specialty clamps

**ONE CYLINDER DOES IT ALL!**  
ProLine's single cylinder provides power for **BOTH** the tilt and level lift.  
Less parts, less maintenance

Radius design allow towers to travel 360° around platform

234 Tie-down holes provide unlimited holding options

1/2" Top deck plate provides stability during pulls

ProLineXL shown with optional 3-bag air jack and down pull assembly

## Not all racks are created equal

- ProLine's 6" deck boasts a top plate engineered Stronger. Standing up to any pull.
- 90" Wide deck provides plenty of space for all makes and models.
- Available in 20' and 22' deck lengths.
- 10-Ton pull towers - Your choice Air or Electric hydraulics.
- 25-Ton single cylinder operates tilt and level lift.
- Level-lift equipped with automatic safety locks (air operated) for technician safety.
- Want additional towers? Just add them!

**10**

**888-777-4450**



Tough enough to handle all the traffic from full frames to long bed trucks - even dualies

## TOUGH ENOUGH FOR PROFESSIONALS



Height adjustable clamping system securely anchors vehicle to rack platform



Level-lift provides eight comfortable working positions ranging from 17" - 40"

**Frame Straightening**



Crossmember on each end removes easily providing technician with under vehicle access



Tie downs install from the top of the deck for a fast, easy, no-hassle set-up

### PLATFORM LENGTH

2 Air/Hydraulic Towers  
2 Central Electric Towers

Lifting Capacity  
Treadway Width  
Center Opening  
Width with Towers on Each Side  
Length with Towers on Each End  
Length with Ramps  
Tower Height From Top of Platform  
From Top of Platform, Extended  
Maximum Pull Height  
Hydraulics  
Hydraulic Electric Power Supply / U.S.  
Working Height (8 working heights)  
17", 22-1/2", 26", 29-1/2", 32-1/4", 35", 37-3/4", 40" (431.80-1016 mm)  
Weight

### 20' L X 90" W Part Number

1060-20XL  
1060-20XLCE

10,000 lb.  
29" (736.60 mm)  
32" (812.80 mm)  
12' 6" (3810 mm)  
25' (7620 mm)  
23' (7010.40 mm)  
75" (1905 mm)  
83" (2108.20 mm)  
65" (1651 mm)  
10-Ton  
115V, 10 AMP  
17"- 40"  
7,800 lbs.

### 22' L X 90" W Part Number


1060-22XL  
1060-22XLCE

10,000 lb.  
29" (736.60 mm)  
32" (812.80 mm)  
12' 6" (3810 mm)  
27' (8229.60 mm)  
25' (7620 mm)  
75" (1905 mm)  
83" (2108.20 mm)  
65" (1651 mm)  
10-Ton  
115V, 10 AMP  
17"- 40"  
8,200 lbs.

[www.CEGroup.com](http://www.CEGroup.com)

# Winner

## Frame Straightening

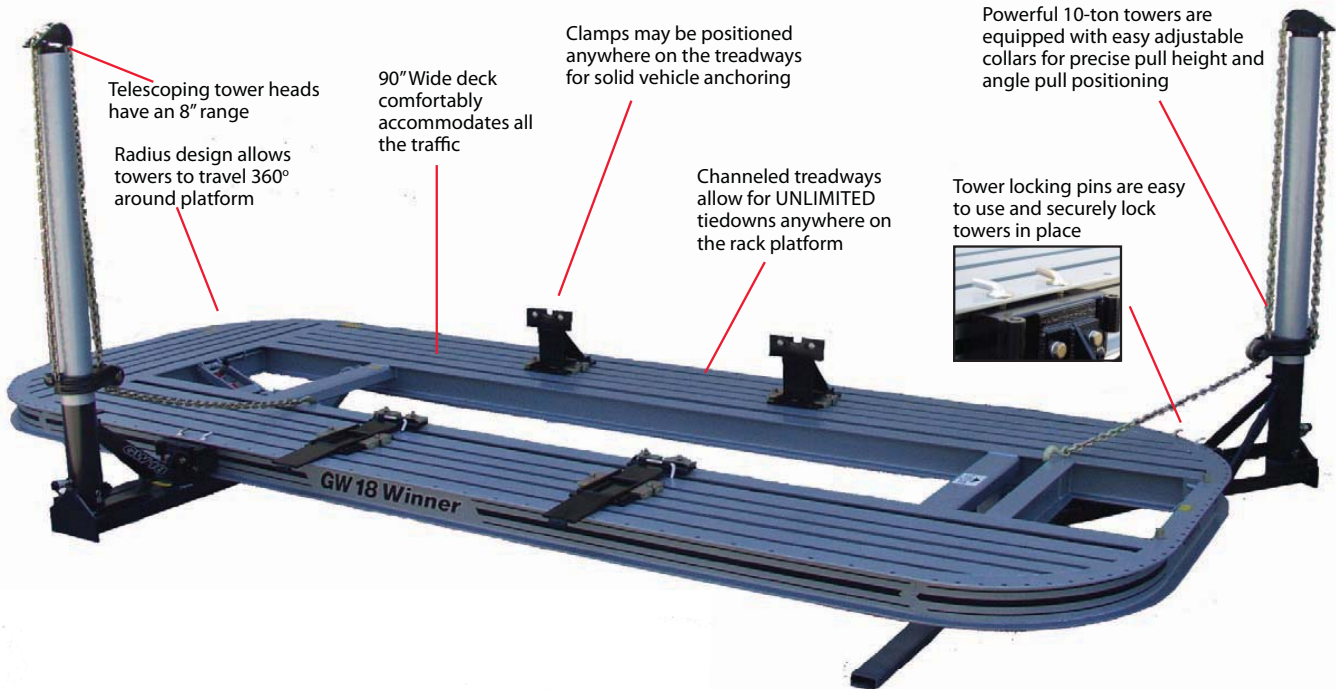

### HIGH PERFORMANCE FEATURES ON EVERY WINNER RACK

- Easy-gliding, 10-ton pull towers (clear floor)
- Unlimited pull height and Angle-pull settings
- True 360° pulling access
- Collapsible clamps (set of 4)
- Channeled treadways
- Removable front crossmember  
Available in 18' and 20' deck lengths  
Variable Height Available from 14" to 40"  
Air or electric hydraulic power available

**12**

**888-777-4450**

Extremely affordable, high-performance frame rack with all the features normally found in more expensive systems




Winner pull towers are rack mounted on easy glide platforms for an obstruction-free workzone - No casters or wheels



The industry's ONLY Collapsible Unibody Clamps fold down flat for fast, easy, no-hassle vehicle loading

**Frame Straightening**

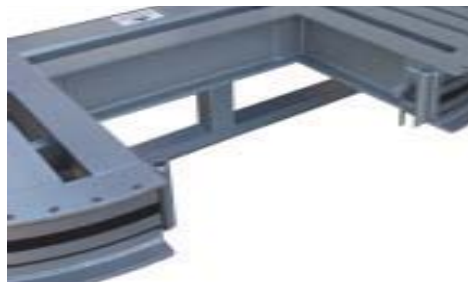

Removable front crossmember allows easy under-carriage access

**PLATFORM LENGTH**

**18' L X 90" W**

**20' L X 90" W**

**Part Number**

**Part Number**


2 Air/Hydraulic Towers, Single Height	1072-18CC	1072-20CC
High Rise Model	1072-18CCHR	1072-20CCHR
2 Central Elec. Towers, Single Height	1072-18-CE	1072-20-CE
High Rise Model	1072-18HR-CE	1072-20HR-CE
Lifting Capacity	10,000 lb.	10,000 lb.
Treadway Width	29" (736.60 mm)	29" (736.60 mm)
Center Opening	32" (812.80 mm)	32" (812.80 mm)
Width with Towers on Each Side	12' 6" (3810 mm)	12' 6" (3810 mm)
Length with Towers on Each End	23' (7010.40 mm)	25' (7620 mm)
Length with Ramps	23' (7010.40 mm)	25' (7620 mm)
Tower Height From Top of Platform	75" (1905 mm)	75" (1905 mm)
From Top of Platform, Extended	83" (2108.20 mm)	83" (2108.20 mm)
Maximum Pull Height	65" (1651 mm)	65" (1651 mm)
Hydraulics	10-Ton	10-Ton
Hydraulic Electric Power Supply / U.S.	115V, 10 AMP	115V, 10 AMP
Working Height	20" (508 mm)	20" (508 mm)
High Rise Models (8 working heights)	14" - 40"	14" - 40"
14", 22-1/2", 26", 29-1/2", 32-1/4", 35", 37-3/4", 40"	(355.60-1016 mm)	
Weight, Single Height Model	4,400 lbs.	4,600 lbs.
High-Rise Model	4,800 lbs.	5,400 lbs.

**www.CEGroup.com**



# PaceSetter

**Frame  
Straightening**

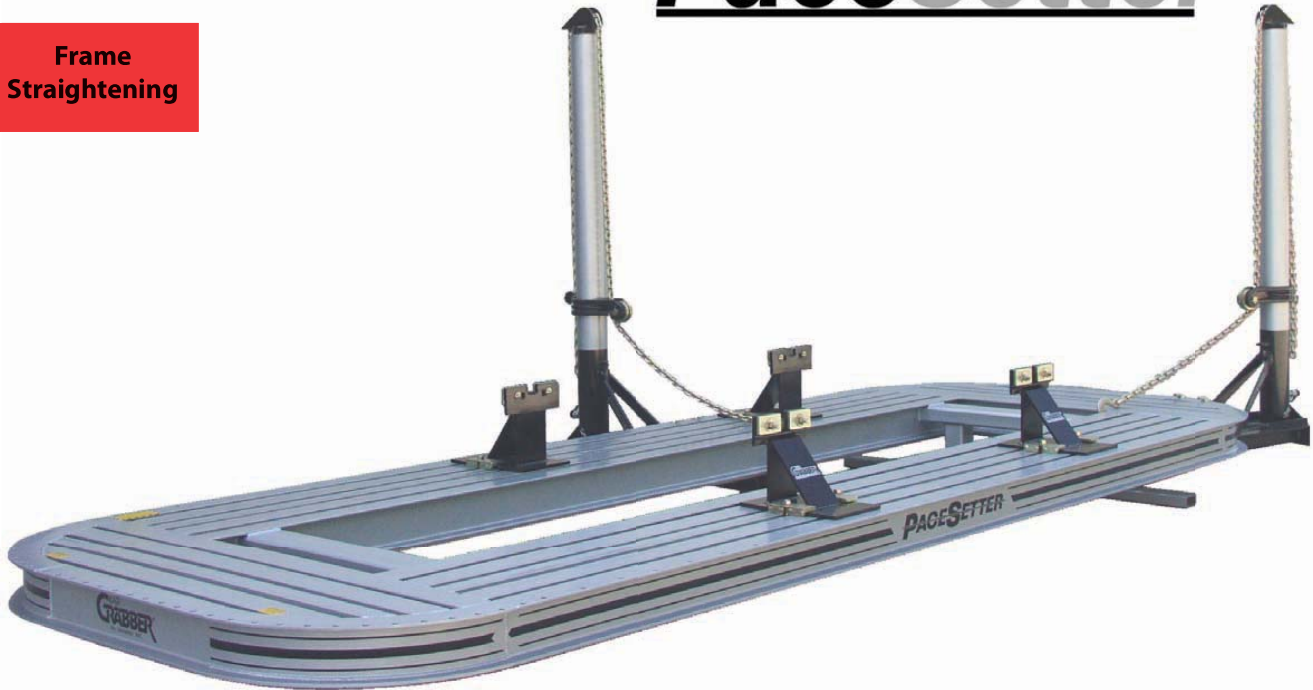

## **Pacesetter- The features you want at a value you deserve**

- 18' x 80" Rack Platform (5.49m x 2.03m)
- Fixed working height of 14" from the floor to the rack platform
- (2) 10-Ton rack mounted pull towers provide true 360° pulling
- Telescoping tower heads have an 8" range
- Standard unibody clamps provide rock-solid vehicle anchoring
- Channeled treadways allow for unlimited tie-down options
- Removable on/off ramps
- Fast and easy set-up
- Customizing available



## **Performance Feature Option**

### **COLLAPSIBLE UNIBODY CLAMPS (Set of 4)**

Unique in the industry, these time saving clamps fold down flat during vehicle loading and can be positioned anywhere on the treadway for solid anchoring.

**14**

**888-777-4450**






## MegaTek Workstation

**Is it a Lift? Is it a Frame Machine? It's BOTH!  
 Make every bay in your shop more productive!**

**Frame  
 Straightening**

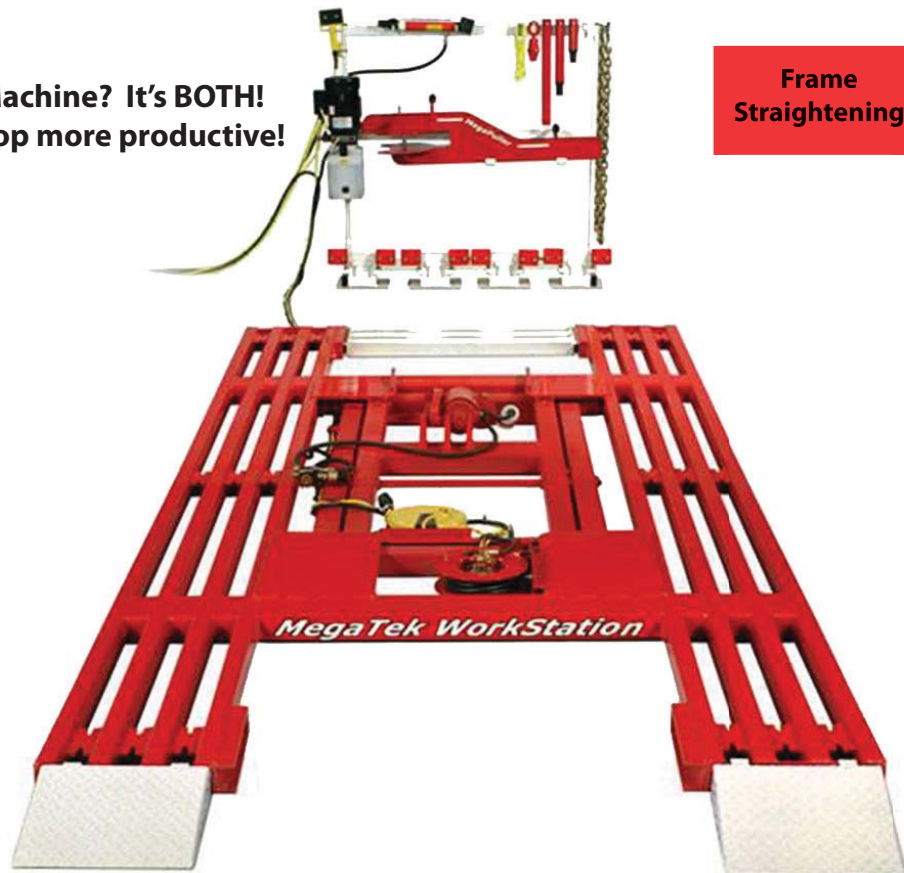

- Lift 6,000 lbs from a flat 3" to 36" off the floor
- Ramps fit Front and Rear for Drive Over
- Pull 4 tons from 360°

- Unibody holding
- Removable Crossmember that fits Front and Rear
- Built in Electric and Air Reels

Deck Length (s)	13'5", 16'
Deck Width	81"
Treadway Width	24"
Pulling Power	4 Tons
Lift Capacity	6,000 lbs

**[www.CEGGroup.com](http://www.CEGGroup.com)**


**15**

## Optional System Accessories

**Frame Straightening**

**Model 24 Accessory Group #1695**

- 1580 3/8" x 10' Heavy Duty Chain with Grab Hook (2)
- 1740 Model C Metal Clamp (1)
- 1760 Model Junior Metal Clamp (1)
- 1814 G Clamp (1)
- 1835 Nylon Sling (1)
- 1870 Junior Versa Hook (1)
- 2002 Many-Hole Wide Draw Bar (1)
- 2003 Small Flatnose Sheetmetal Hook (1)
- 2004 Large Flatnose Sheetmetal Hook (1)
- 5085 Accessory Group Tool Board with Hooks (1)

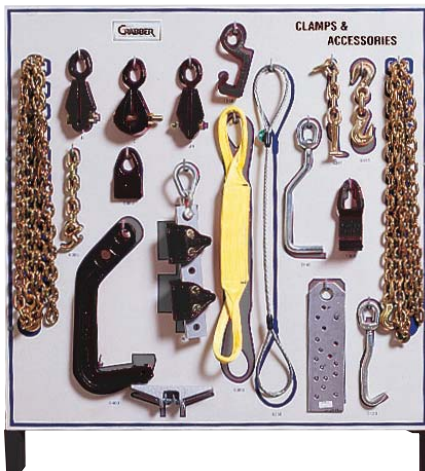

**44 PRO Accessory Group #1675**


- 1580 (2) 3/8" x 10' HD Chain w/Grab Hook
- 1605 (1) GM R-Hook w/3/8"x6" Chain (6306)
- 1609 (1) Ford T-Hook w/3/8"x6" Chain (6311)
- 1730 (1) Model B Metal Clamp (0100)
- 1740 (1) Model C Metal Clamp (0200)
- 1760 (1) Model Junior Metal Clamp (0300)
- 1795 (1) Frame Rack Unibody Clamp (4010)
- 1811 (1) Regular Deep Hook Set (6400)
- 1820 (1) Tac-N-Pull Clamp (0800)
- 1834 (1) Cable Sling (6350)
- 1835 (1) Nylon Sling (6300)
- 1853 (1) Panel Puller (1250)
- 1932 (1) Sill Hook (1300)
- 2002 (1) Many-Hole Wide Draw Bar (4048)
- Sheetmetal Hooks
- 2005 (1) SM. Roundnose (3120)
- 2006 (1) LG. Roundnose (3140)
- 5090 (1) Tool Board with Hooks

## Universal Truck Holding System

SOLID, SECURE AND TRULY UNIVERSAL

Grabber's Universal Truck Holding System makes rock solid anchoring of full-frame vehicles easier and more reliable than ever before.

The System has four uniquely engineered anchor stands that eliminate the sway and movement common with chain-type anchoring. Used with any of Grabber's channeled treadway frame racks, the stands can be positioned anywhere on the rack to meet varied frame configurations. The stands are height-adjustable and can be easily locked securely to the vehicle. Two head designs are provided to accommodate either box or channel frames. With all four stands secured, solid anchoring permits precise frame alignment.

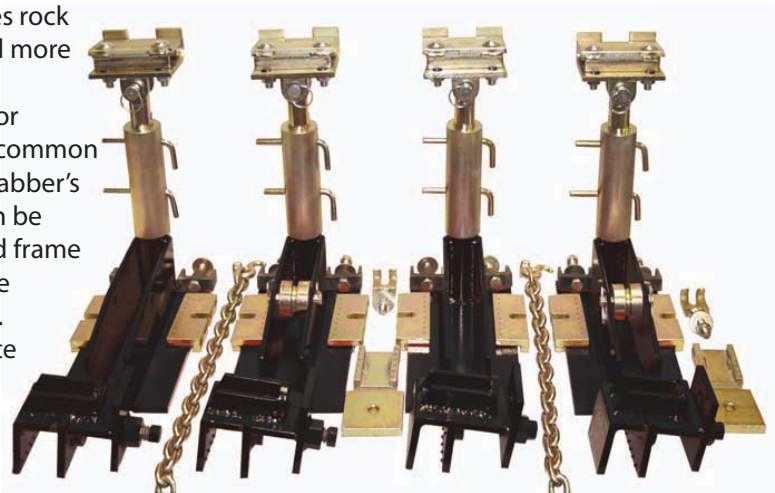

**Frame  
Straightening**

### Roof & Engine Pull #2061



### 1671 - JP Jack Pack

- 5004 Air Jack (1)
- 4072 Rack Down Pull Assembly (1)
- 2031 Treadway Tie Down Assembly (2)



### Down Pull Assembly #4069 For channeled treadway racks



[www.CEGroup.com](http://www.CEGroup.com)


**17**



## Body Loc's Elevated Pulling System BL76T Rocker Loc Chainless Anchoring System

### Frame Straightening

With the Body Loc BL76T you can work under, on top or the sides of any vehicle. There is no crawling, climbing or leaning over a rack. Try working like this on a rack! The elevated pulling system can save you time and money. Cut your cycle-time and you'll increase your profits! Most shops, even with the "Best Drive-On Machines" still do 80 percent of their framework on the floor. Therefore, the shop with the best floor equipment does better work faster and makes more money.

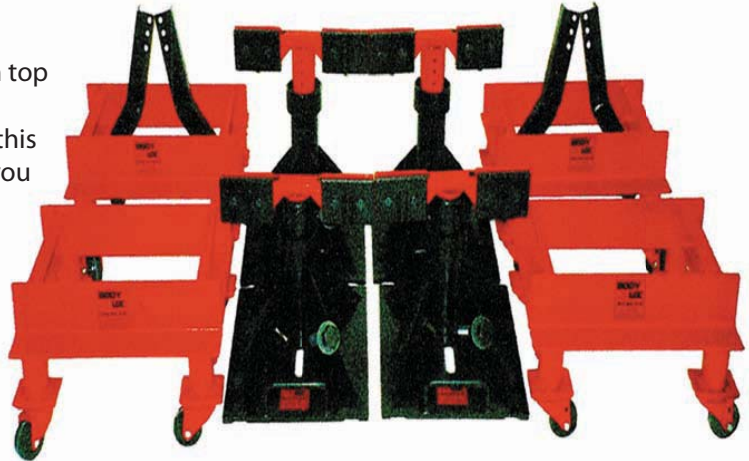

### Body Loc Floating Power Post BL27C

This floating post eliminates the pushing, shoving and tilting of a large piece of equipment.

- 6' tall
- Self Aligns
- Easy to Maneuver
- 10 ton – 10" continuous pull
- Cam handle locks collar at any height



## Quadra Block Truck Holding Quadra-Block Adapter Systems Heavy Duty Truck / Full Frame Anchoring

A Heavy Duty Truck Anchoring System  
without being  
Heavy on your Wallet!

Frame  
Straightening



Box Frame



C-Channel



Spring Mount




- Consists:
- 4—Box Frame Adapters
  - 2—Spring Mount Adapters
  - 4—15" Link Chains
  - 8—C Channel frame Adapters
  - 4—5' Chains
  - 8—Chain Turn Buckle with Wrenches

\*Quadra Block bases and cart not included in Kit

## Quadra Block Mercedes, BMW and Corvette Anchoring Clamp Set

A set of four—Mercedes, BMW, and Corvette Anchoring Clamps that mount onto the Quadra-Block bases



BMW Slot



Corvette



Mercedes/BMW



Mercedes Hole Holders

[www.CEGroup.com](http://www.CEGroup.com)

19



## Stanzani Heavy Duty Premium Pull Clamps


### Frame Straightening



- #130 Autoblock 100mm
- Self Locking Pull Clamp 6 ton- 100 mm
  - Self-locking pull clamps with fast fastening by means of threaded pin mounted to the pull ring.
  - The Autoblock clamps remain locked on the metal panel without applying pull strength.
  - Interchangeable jaws in special hardened steel for long life.
  - Jaws width 100 mm for heavy pulls on thin metal sheets.



- #140 PinzaPull clamp with deep groove (45 mm)
- Special pull clamp with internal groove 45 mm width, equipped with two screw rings for 90° pull.
  - Thank to its deep groove, this pull clamp is particularly suitable for pulls on thick frame parts.

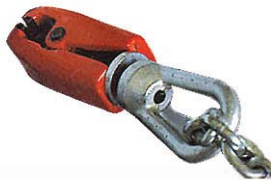

- #134 Magnum 10 T  
Heavy Duty Pull Clamp
- Autoblock Magnum is a selflocking pull clamp and eliminates the need to bolt on to the damaged panel before pulling.
  - Magnum is provided with a much wider and deeper jaw to get right into pulling area. Suitable for pulls up to 10 ton.
  - The little jaws are interchangeable.



- #135 Swivel Clamp  
Swivel Clamp with interchangeable jaws



- #133 Right Angle Clamp  
Right Angle Pull clamp- Interchangeable jaws



**3100 Sheet Metal Hook**  
 Weight: approximately 2 lbs (.91 kg) each  
 Capacity: 2 tons (1,814 kg)




**0480 135-Degree Swivel Clamp**  
 Gripping Surface: 2" wide (51 mm)  
 Overall Length: 5" (127 mm)  
 Weight: 5.7 lbs (2.6 kg)  
 Capacity: 5 tons (4,536 kg)

**Frame Straightening**



**0100 B Clamp**  
 Gripping Surface: 2¼" wide (57 mm), 1" deep (25 mm)  
 Overall Length: 9½" (241 mm)  
 Weight: 7 lbs (3.18 kg)  
 Capacity: 6 tons (5,443 kg)

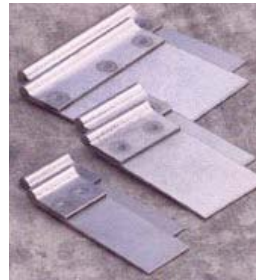

**0805 Plate Kit**  
 Ten (10) 0801 1" Pull Plates  
 Five (5) 0802 1½" Pull Plates  
 Five (5) of 0803 3" Pull Plates.  
 For use with the 0800 Tac-N-Pull™ Clamp.  
 (Clamp not included in kit.)



**0200 C Clamp**  
 Gripping Surface: 2" wide (50 mm), 5/8" deep (16 mm)  
 Overall Length: 8½" (215 mm)  
 Weight: 7 lbs (3.18 kg)  
 Capacity: 5 tons (5,436 kg)



**0300 Jr Clamp**  
 Gripping Surface: 1½" wide (38 mm), ¾" deep (19 mm)  
 Overall Length: 9" (229 mm)  
 Weight: 5 lbs (2.27 kg)  
 Capacity: 5 tons (4,536 kg)




**0305 Dyna-Mo Jr**  
 Gripping Surface: 1¼" wide (32 mm), 1" deep (25 mm)  
 Overall Length: 7" (178 mm)  
 Weight: 2 lbs (.91 kg)  
 Capacity: 3 tons (2,722 kg)



**1250 Panel Puller**  
 Overall Length: 8" (203 mm)  
 Width: 3" (82 mm)  
 Weight: 3 lbs (1.36 kg)  
 Capacity: 3 tons (2,722 kg)



**4048 Wide Draw Bar**  
 Overall Length: 14½" (368 mm)  
 Width: 4" (102 mm)  
 Weight: 7 lbs (3.18 kg)  
 Capacity: 3 tons (2,722 kg)

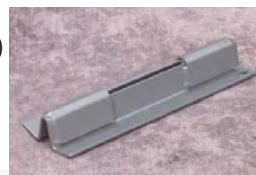

**5830 Saddle Mate™**  
 Overall Length: 10" (255 mm)  
 Weight: 2.5 lbs (1.13 kg)



**Frame  
Straightening**



0550 T.O. Clamp  
Gripping Surface: 1½" wide, ½" deep  
Overall Length: 6½" (165 mm)  
Weight: 3 lbs (1.36 kg)  
Capacity: 3 tons (2,722 kg)



6311 Ford T Hook with 5/16" chain  
Overall Length 228mm  
Weight 2 lbs. (91 kg)  
Capacity 4 tons (3,629kg)



4052 Triangle  
Weight: 1 lb.  
Capacity: 5 tons (4,536 kg)



4145 Dbl Grab Hook  
Overall Length: 8½" (222 mm)  
Weight: 3 lbs (1.36 kg)  
Capacity: 10 tons (9,072 kg)



0800 Tac-N- Pull with Plates  
Gripping Surface: Up to 3" wide (76 mm)  
Overall Length: 5 1/2"  
Weight: 3 lbs (1.36 kg)  
Capacity: 3 tons (2,722 kg)



1300 Sill Hook  
Gripping Surface: 2½" wide (63 mm), 1" deep (25 mm)  
Overall Length: 8½"  
Weight: 5 lbs (2.27 kg)  
Capacity: 5 tons (4,536 kg)



4010 Unibody Clamp  
Gripping Surface: 8" wide, 3/4" deep  
Overall Length: 14½"  
Weight: 19 lbs (8.62 kg)  
Capacity: 5 tons (4,536 kg)



4146 Grab/Slip Combo  
Overall Length: 9 1/2"  
Weight: 3 lbs (1.36 kg)  
Capacity: 7 tons (6,350 kg)



0650 Box® Clamp  
Gripping Surface: 2" wide, 2" deep  
Overall Length: 10"  
Weight: 10 lbs (4.54 kg)  
Capacity: 4 tons (3,629 kg)



1000 Handy Hook™  
Overall Length: 165 mm  
Weight: 2 lbs (.91 kg)  
Capacity: 5 tons (4,536 kg)





**4020 Four-Way Pull Clamp™**  
 Gripping Surface: 4" wide (102 mm), 3/4" deep (19 mm)  
 Overall Length: 8" (203 mm)  
 Weight: 12 lbs (5.45 kg)  
 Capacity: 6 tons (5,443 kg)



**4035 Angle Bracket™**  
 Overall Length: 6" (152 mm)  
 Weight: 4 lbs (1.81 kg)  
 Capacity: 6 tons (5,443 kg)

**Frame Straightening**



**5616 Door Puller Twister**  
 Overall Length: 5½" (133mm)  
 Slots: 1/2" x 11/2" (12mm x 39mm)  
 Weight: 2 lbs (.91kg)  
 Capacity: 2 tons (1,814kg)



**6350 Cable Sling™**  
 Overall Length: 36" (915mm)  
 Weight: 2 lbs (.91kg)  
 Vertical Capacity: 1.5 tons  
 Choke Capacity: 1 ton  
 Basket Capacity: 2.5 tons



**6300 Sling**  
 Overall Length: 30" (762mm)  
 Weight: 1 lb (.45kg)  
 Vertical Capacity: 2.5 tons (2,268kg)  
 Choke Capacity: 2 tons (1,814kg)  
 Basket Capacity: 5 tons (4,536kg)



**6313 Ford T Hook with Grab Hook**  
 Overall Length 6" (228mm)  
 Weight 2 lbs (.91 kg)  
 Capacity 4 tons (3,629kg)



**4120 Double Claw Hook**  
 Overall Length: 5" (127 mm)  
 Weight: 2 lbs (.91 kg)  
 Capacity: 6 tons (5,443 kg)



**6400 Deep Hook Set**  
 Overall Length: 19" (482mm)  
 Throat Depth: 6" (152mm)  
 Throat Opening: 14" (356mm)  
 Weight: 19 lbs (8.62kg)  
 Capacity: 5 tons (4,536kg)



**6317 J Hook 3/8" with Grab Hook**  
 Overall Length 6" (228mm)  
 Weight 2 lbs (.91 kg)  
 Capacity 4 tons (3,629kg)



**4024 Frame Rack Dyna-Mo™**  
 Gripping Surface: 3½" wide (95 mm)  
 Weight: 4 lbs (1.8 kg)  
 Capacity: 5 tons (4,536 kg)



### 10 Ton Single Acting Cylinder Base

#### Frame Straightening

- Used for stabilizing the Single Acting Cylinder, which will provide a more steady and balanced footing
- Reinforced welded construction
- Carry handle



### 10 Ton 4" Stroke Single Acting Cylinder

- Internal plunger threads
- Snap-in grooved saddles
- Plunger wipers help seal out dirt
- Collar fixture threads
- Two base mounting holes
- Maximum working pressure: 10,000 psi/ 700 bar



### 4 Ton Porto-Power Kit

- 4-Ton capacity gives you the pushing and spreading power you need to make fast and easy work of everyday repairs
- Snap-lock design for quick and easy assembly
- Automatic pump overload system protects against damage to rams and equipment
- Flex head features permanently molded rubber pad-interlocked to prevent separation
- 1/2 ton capacity hydraulic spreader features 2" jaws and spreads from 5/8" to 3-3/4"



### 10 Ton Threaded Ram

- Designed for use in all positions
- High strength alloy steel for durability
- Heavy duty return springs
- Collar thread protectors
- Rod wipers seal out contaminants
- Industrial hard chrome plated ram prevents rust corrosion

24

888-777-4450



## 86006

### 6000 LB. CAPACITY 24" LOW RISE OPEN CENTER PIT LIFT

- Open center design does not interfere with guards and equipment that need to attach or slide on lubrication pit rails.
- Hydraulic velocity fuse allows slow release of lift in the event of hose or hydraulic component damage.
- 4-1/2" low profile includes the thickness of the rubber lift pads.
- Four rubber lift pads, 17-3/4" x 17-3/4" provide quick loading and unloading of vehicle.
- A set of four each, rubber riser blocks (1-1/2" thick) included for added clearance when needed.
- Automatic mechanical safety lock will lock in 14-1/2", 19", and 24" lift heights.
- Vehicle can be loaded at either end of lift.
- Fast and efficient operating pump powered by a 1hp, 115 volt motor (1 year warranty on pump and motor).
- Includes all hoses, fittings and mounting hardware for ground surface installation.



Lifts/  
Jacks

## 86002

### 6000 LB. CAPACITY 48" MID-RISE LIFT



- Portable trolley supports the pump and maneuvers the lift from one service bay to another.
- Twin hydraulic cylinders and scissors lift design provide maximum support and stability.
- Hydraulic velocity fuses allow slow release of lift in the event of hose or hydraulic component damage.
- 4-3/4" low height for easy drive on and off.
- Fast and efficient operating pump powered by a 1 hp, 115 volt motor (1 year warranty on pump and motor).
- Sliding radius arms easily adjust to vehicle frame lift positions.
- Automatic mechanical safety lock will lock in a 26-1/2", 34-1/2", 41" or 48" lift height.
- A set of four 2-1/8" riser plates and four swivel rubber lifting pads are included.

[www.CEGroup.com](http://www.CEGroup.com)

25



## Eagle Mechanix Series Two Post lifts

### Lifts/ Jacks

- True asymmetric design allows the vehicle to be positioned so that doors open without fear of hitting columns
- 30° rotated single piece column
- Direct push drive design
- Dual hydraulic cylinders
- Automatic arm restraint
- Overhead shut-off bar
- Truck and van adapters included



Specifications	MTP-9A	MTP-11A
Capacity	9,000 lbs	11,000 lbs
Lifting Speed	45 Sec	50 Sec
Motor Rating	2HP 220v	2HP 220v
Amperage	20 amps	20 amps
Lifting height with adapters	84"	76"
Width overall	138-1/2"	137-1/2"
Width between Posts	115"	110-3/4"
Drive thru Clearance	104"	98-5/8"
Height Overall	141"	141"-145"
Shipping Weight	1575 lbs	1950 lbs

**26**

**888-777-4450**



## Eagle ALI/ETL Certified Two-Post Asymmetric lift



Lifts/  
Jacks

- Direct drive hydraulic cylinder - fewer moving parts for greater reliability and lower total owner cost
- Maintenance-free UHMW carriage sliders
- Rotated column design gives you greater vehicle access
- Fourteen (14) step safety locks
- Single point safety release
- Full time engages safety system makes lift easy to operate and safe to use
- Asymmetric design allows car doors to be opened easily
- Plastic powder coated finish for durability
- Includes 8-piece truck/van adapters

Lifting capacity	10,000 lbs.
Lifting height	78"
Overall height	145"
Overall width	132"
Drive-through clearance	85"
Width between posts	100"
Motor	1hp 220VAC

[www.CEGroup.com](http://www.CEGroup.com)

27



### 3 Ton "Magic Lift" Service Jack, SUV

- Comes standard with heavy duty one piece reinforced steel handles
- Rugged steel wheels and full swivel ball bearing casters
- Specifically designed for light truck, van, and SUV applications with its higher lifting height and greater capacity



Lifts/  
Jacks



### 1 Ton Foldable Engine Crane

- Heavy duty welded construction with rugged reinforced tubular steel
- Metered control release valve for lowering boom at a precisely-controlled rate of speed
- Special 8 Ton hydraulic long rams are equipped with a patented built-in by-pass mechanism

### Tough Omega Bottle Jacks available in a 6 ton to 50 ton capacity and standard and "Shorty" heights.

- Hydraulic system is protected from internal damage by a patented by-pass mechanism
- Machined and polished cylinders with die-cut threads provide non-abrasive leak-free, durable performance
- Fabricated from hard-cast steel with heat-treated critical stress areas
- Serrated heat-treated saddle provides generous lifting area and secure grip
- Heat-treated extension screw allows low pick-up height adjustment and maximum lift height
- U.S. Patented built-in by-pass device protects hydraulic system from overpumping damage
- Unique cross-type forged release valve assures positive control



### Ratchet Style Jack Stands

- Sturdy, welded steel construction for superior safety and strength
- One piece, multi-position ductile ratchet bar provides super strength and durability, and quick adjustment mechanism that securely locks into desired location
- Counter-weighted pawl serves as a safe, secure locking device to prevent the load from accidentally disengaging
- Available in 3-ton, 6-ton and 12-ton



28

888-777-4450



Selson air jacks are a unique design that uses compressed air to raise and lower motor vehicles quickly and easily.

Their safety, reliability and speed make Selson air jacks the ideal choice for underbody servicing, wheel alignment, tire replacement services and body repair work.

**Lifts/  
Jacks**

- Fast and Friendly
- Designed for stability
- Overload safety valve
- Easy-care long life
- Only one air line needed
- Reliability built-in



Speed and portability provide the ultimate tool for tire, wheel and suspension work. Two bag or Three bag units provide the ultimate tool for tire, wheel available, 13 1/4" or 18" both at 2 tons lifting capacity at 105 PSI.



## DJS Universal Dolly System

Lifts/  
Jacks



Save time and money by easily moving undriveable vehicles. Dolly wheel failure is virtually eliminated through the use of uniquely designed wheels. Eliminate accidental damage caused while moving vehicles onto frame racks and other locations.


### 3 Different Configurations



Wheel On



Rocker

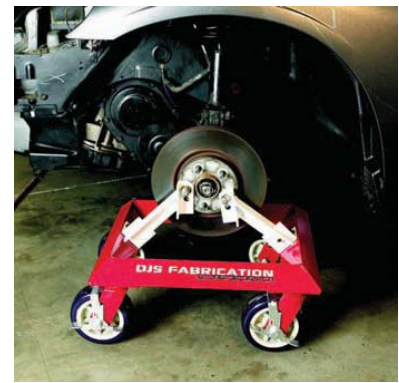

Hub

Ideal for moving onto:

- Onto and Off frame racks
- Into paint booths

- Across raised doorway thresholds and low driveway entry curbs
- Over rough and uneven surfaces
- Into Storage

30

888-777-4450





Portable jack/ dolly that lifts any car in seconds. One person can move the car into the paint booth or across the shop with incredible ease.

Various capacities available up to 6,200 lbs, plus a new wider unit for those big tires. Also storage units to fit many applications.




**Lifts/  
Jacks**

**BL-90 DMV JR.**



Eliminate waiting for the wrecker and easily move vehicles between the lift and rack

- Fits between arms on lift
- Easily pulls on rack
- Wheels adjust from 24" to 88" to fit any rack
- Sets up on pinch weld clamps, dowel pins or frame saddles
- Arranges in dozens of combinations to fit any unitized or frame vehicle

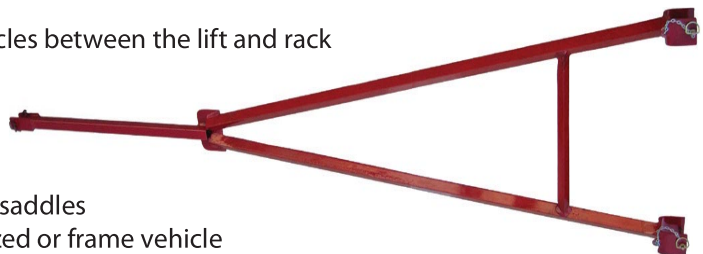



## Liquid Cooled Inverter Spot Welder 800 HF

**Welding/  
Dent Pulling**

- Liquid Cooled, 3 Phase, 14,000 Amp. Power Plant
- Permanently fixed single and double side spot welding guns
- Max. tip pressure 550daN (1,200 lb force)
- Digitally controlled programmable weld settings enabling factory quality welds
- Complete with dent pulling package for welding: Pulling washers, rivets and wiggle wire etc.



Power supply requirements AC Input	280-240V 3 phase
Main Frequency	50-60 Hz
Welding Current Regulation	Yes-Automatic by processor
Max Welding Current (RMS)	14,000 Amps
Main Fuse	70 Amp, slow blow
Welding Frequency	2000 Hz
Operating Air Pressure	8 bar (110 to 110 psi line pressure)
Electrode Force	550 daN (125 mmm Arms Set)
Electrode Arms Diameter	0.875"
Cooling Mechanism; Circuits, Cables and Arms	Liquid (Sealed Unit)
Nominal Operating Temp	86 degrees F
Weight of C Clamp (w/o arms)	15.4 lbs.
Welding Cable Diameter	350MCM/8 feet Liquid Cooled
Dimension (Excluding Boom) H/W/L	58 1/2"/ 25 1/2"/ 27 3/4"
Weight	532 lbs

**32**

**888-777-4450**

## Heavy Duty Spot Welder - Liquid Cooled 750 HF

- Maximum 12,000 amps output power at the tips maintained by automatic power compensation
- Liquid cooling system
- Clamping force of over 1000lbf at 115psi (450daN at 8 bar)
- Advanced Inverter technology
- Digitally controlled programmable weld settings for producing factory quality welds
- Backlit LCD display for programmable selection
- Innovative design for weld bonding through adhesive
- Comes with fender/wheel well electrode, 500 mm U arm, and retractable weight bearing pulley



**Welding/  
Dent Puling**

Nominal input power	208-220V - 3 phases
Fuse or breaker	70A Slow blow
Secondary short-circuit maximum current (RMS)	12000A
Frequency	50Hz / 60Hz
Welding Frequency	2000Hz
Welding Cable Length	8'
Cooling system (cable, arms and cap)	Liquid
Nominal operating temperature	86° F
Tip pressure at 8 bar (115psi)	450daN (1000lbf)
Clamp weight (without arms)	13 lb
Weight	397 lb

**[www.CEGroup.com](http://www.CEGroup.com)**

**33**



## High Frequency Compression Spot Welding Machine 700 HF

### Welding/ Dent Pulling

- Designed to weld all new high strength steels
- Delivers over 10,000 amps at the electrode tips
- Ensures factory quality wheels
- Gradual start of the weld eliminates current peaks, reduces electricity consumption
- Slim ergonomic design enables use between cars and facilitates operation in narrow shop bays
- Cable position facilitates work on any part of the car
- Low fatigue factor with welding cables supported by a pivoting boom and harness
- Cooling system utilizes induced air (no water system to maintain)
- Easy to use control panel within easy reach of the operator. 6 functions with 4 working memories
- Power and time ranges pre-adjusted according to the mode chosen
- High pressure pneumatic clamping

Power supply requirements	203-230V, 380-415V, 3 phase
Main Frequency	50/60Hz
Welding current	DC
Welding current regulation	Yes - Automatically by microprocessor
Max welding current (RMS)	10,000A
Main Fuse	50/32 Amp slow blow
Nominal power/50% ED	70 KVA
Main cable length	25'
Welding Frequency	2000 Hz
Operating air pressure	6 to 8 bar
Electrode force	798 lb
Electrode arms	20 mm
Electrode tips	15.5 mm
Welding Cable Length	8' air cooled
Dimension H/W/L	35"/18"/28"
Weight	280lb



**34**

**888-777-4450**





## Model 1250HS— Hybrid Resistance Welder

ARC Manufacturing, the leader in D.C. welding technology has developed a patented series of hybrid resistance welder/dent pullers which operates on a combination of battery and transformer power. The welder can produce 10,000 electrode amps with 10 feet of cable reach. This unit also has a high duty cycle, but unlike inverter welders, this welder only requires 110 volt 20 amp power source. Along with up to 1000 lbs of electrode tip pressure, the weld nuggets measure 8.7mm on 3 + 3mm structural steel. This 4 cable system has a smart digital microprocessor which monitors the welder's performance at all times.



- The welder can produce 10,000 electrode amps with 10 feet of cable reach.
- This unit also has a high duty cycle, but unlike inverter welders, this welder only requires 110 volt 20 amp power source.
- Along with up to 1000 lbs of electrode tip pressure, the weld nuggets measure 8.7mm on 3 + 3mm structural steel.
- This 4 cable system has a smart digital microprocessor which monitors the welder's performance at all times.
- This unit comes air-cooled or water-cooled.

**Welding/  
Dent Pulling**

## Model 1050US— Spot Welder/ Dent Puller

The Panel Beater 1050 US is a Resistance Spot Welder/Dent Puller. The 1050 US produces professional 6mm factory type welds and is equipped with air cooled cables. The unit spot-welds supports and panels and removes dents and creases fast and easy. The unit is high amperage battery operated and there are no heavy powers sources required. Welds penetrate galvanizing, sealers and coatings. The 1050 US has been approved by the makers of Fusor Repair Adhesives for weld bonding.

- No Heavy Power Source Required (110V 15amp)
- Used in North America Auto Manufacturing.
- 8800 amp Output
- Approved by Adhesive Manufacturers for Weld Bonding Process.
- National Distribution.
- Excellent Warranty and Service.
- Air Cooled or Water Cooled (Optional).
- Specifically Designed for all Power Sources.
- Welds through Primers and E-Coat.



[www.CEGroup.com](http://www.CEGroup.com)

**35**



**Welding/  
Dent Pulling**



## **ARC 1000DX #1 Dent Puller on the Market**

- Output Amperage Equal to 220v Models
- ARC is the leading manufacturer in high amperage battery powered equipment.
- Removes dents and creases fast! Simply stick the electrode to the dent by pushing the switch, pull out the dent and twist it free... "Stick...pull...twist"
- Shrinks bulges and tightens the metal.
- Optional Wave Wire package available includes 4 and 10 Finger Claw, Welding Tool and 1/2 lb. Wire.
- Repairs panels three times faster!!!
- One year unconditional full warranty.
- Pro-rated battery warranty.



## **Multiple Pull Dent Station**

This powerful 220 volt single phase dent pulling station provides the technician with all the power and versatility needed to pull rocker panels, hail damage, creases, and dents and shrink stretched metal. The efficiency of this tool increases your productivity while producing a cleaner, better repair.

**36**

**888-777-4450**



## DF 900

The most complete aluminum repair station "from a name you know and trust!"

The DF-900 Alu-Spot complete repair system includes everything you will need to repair aluminum panels in one workstation. In order to prevent galvanic corrosion of the material, a separate set of highly polished dollies and hammers are required and included. While under tension, the metal must be heated to 200 degrees Celsius (392 degrees F). Dent Fix has included a locking squeeze puller, digital heat gun, and infrared temperature gauge. In order to sand and clean the working surface, they have included a pneumatic grinder that uses 3M Roloc Discs and a stainless steel brush. Long with the capacitor discharge welder and the station cart, this unit is the most completely thought out unit available.

Welding/  
Dent Puling

The weld gun is attached to 17 feet of weld cable allowing you easy access to any panel on the car. The ground is attached to the gun itself, just like a stud welder, making it unnecessary to attach separate ground cables. This comes in very handy when working on hoods and roof panels.

If you are serious about aluminum repair, then you need a serious system. The Alu-Spot is the right choice to advance your capabilities.



### Component List

- 110 Volt Capacitor Discharge Welding Unit
- Locking squeeze Type Pulling Handle
- Storage Cart
- 5 Polished Hammers
- Curved pein & finishing hammer
- 5 Polished Dollies
- 3 Nylon Dollies
- Pneumatic Grinding Sander (DF-3511)
- Digital Temperature Set Heat Gun
- Infrared Non Contact Thermometer with Laser Guide
- Body File Holder and 350mm Flat Flexible File
- Stainless Steel Brush

[www.CEGGroup.com](http://www.CEGGroup.com)

37



**UltraMig®**



## AMH Ultra Mig Welders

UltraMig synergic MIG welding machines are built with state-of-the-art components and technology to facilitate use by the operator from the apprentice to the professional. Synergic control allows the user to work out of position without returning to the panel to make adjustments. Volts, amps and wire feed are perfectly matched and synchronized, and are controlled by one knob on the gun handle.

**Welding/  
Dent Pulling**

Control of the primary (incoming) voltage prevents any fluctuations in the output.

### UltraMig 200

The machine for the next millennium. This MIG welder meets today's needs and tomorrow's. Ultimate control at your finger tips with a state-of-the-art touch pad panel. Programmed for three wire size for steel or aluminum. Spot and stitch weld modes. Fine tuning of wire speed and weld time. Work out of position. Synergic control on the handle allows precise adjustments while welding! Spool gun receptacle is already built in. Patented "self-compensating" wire drive system adjusts for any wire size and prevents "bird nests." Chosen for its advanced technology as major sponsor for autobody repair in world competition at the 35th (Montreal '99) and 36th (Seoul '01) International Skill Olympics.



**38**

**888-777-4450**





## AMH Ultra Mig Welders



Welding/  
Dent Puling

### UltraMig 225

The UltraMig 225 is a powerful SYNERGIC machine designed for a wide variety of applications including MIG brazing of fully galvanized steel using SILICONE-BRONZE wire and MIG welding of STEEL and ALUMINUM all in one package. The micro-processor controlled system is preprogrammed for selected wire types and sizes. UltraMig 225 allows the operator to choose combinations with the touch of a keypad and take total control with one knob on the torch. Voltage and wire speed are perfectly synchronized to deliver a stable arc and achieve optimum results.

- Less welding spatter and burn through
- Minimal warping and loss of metal properties
- Maximum protection of galvanized coatings

[www.CEGGroup.com](http://www.CEGGroup.com)

39



**DF DF-15DX Spitznagel Spot Annihilator Deluxe Spot Weld Drill Kit -  
UHSS, BORON and AHSS Capable  
THE ONLY HIGH-TORQUE DRILL WITH LOW SPEED FOR ULTRA HIGH STRENGTH STEELS.**

**Welding/  
Dent Pulling**



The "Original Spitznagel" Spot Weld Drill that applies the cutting pressure pneumatically. You do not have to push on the drill bit. Our patented valved cylinder applies gentle pressure toward the panel. When the drill bit starts to turn even more pressure is applied. This "Smart" pressure valve helps prevent breakage of bits and applies correct consistent pressure from the first to the last spot weld, ensuring the long life of your bits by preventing breakage. The 1000-rpm motor makes sure you do not burn up bits prematurely and is perfect for Higher Strength (HSS) and Boron Steels (UHSS). The DF-1690 specialized Tungsten Carbide drill bit is needed to drill through Boron steels.

DF-15DX Kit includes:

- (1) 1000 RPM Spitznagel Spot Weld Drill
- (1) 8mm HSCO Bit
- (2) 8mm Titanium Coated HSCO Spot Weld Drill Bits
- (1) 10mm Titanium Coated HSCO Spot Weld Drill Bit
- (1) Bottle of Pneumatic Tool Oil
- (1) In-line Oiler
- (1) Deluxe Storage Case

**40**

**888-777-4450**



## DF-1690 Boron Steel (STC) Spot Weld Drill Bit for UHSS, AHSS and Boron Steels



The Boron Killer. The ONLY way to drill through Boron Steel is with this bit. This drill bit was created to specifically cut spot welds from Boron Steel.

Made of Tungsten Carbide this 8.0 mm, special multi-layered coated, 3-fluted drill bit is the only bit that is tough enough to drill through and survive Ultra High Strength Steel, aka "Boron Steel".

The three cutting edges help spread cutting forces over a greater area, thus helping prevent premature breakage. The Multi-Layer coating makes lubrication unnecessary. Think of it as a kind of Teflon anti-sticking surface.

**Welding/  
Dent Puling**

This bit may be used with our original red ringed 1800-rpm drill or better yet with our new blue ringed 1000-rpm drill. When used with the 1800 rpm drill it is suggested that air flow be restricted slightly to decrease rpm.



## DF-815 The Flame Shield Weld Blanket

Ideal for all welding applications. Its lightweight: Weighs less than 3 pounds and can be held up with masking tape. It's impervious to flame: Protects from high heat, slag and will not allow accidental melting or burning, 60" x 80".

[www.CEGroup.com](http://www.CEGroup.com)

41




## BH 42 Bumper Holder

- Holds bumpers, spoilers, mirrors, etc... for painting
- Tilts to each side and locks in virtually any needed position
- Wheels on one end for easy handling. Comes with SP-2 spoiler adaptor

## BD 45 Pickup Bed Dolly

- 3ft-4in. wide x 6 ft. long
- Folds to 5" swivel casters with locks
- 800 lb. load rated

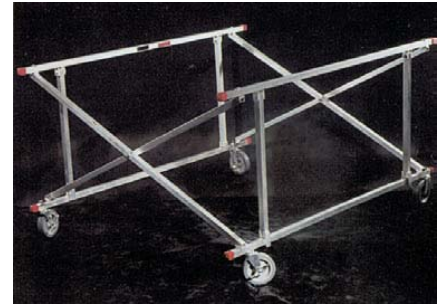

### Rack/Stand/ Carts



## PH 75A Adjustable Paint Hanger

- 7 ft. long adjusts 5 ft. up to 8 ft. for painting tail gates, doors, hoods or fenders
- Hooks slide on top rail

## DS 4 Door Stand

- Holds doors for easy jamming and painting
- 5" swivel casters with locks

L=64"W=30"H=55"



# 42

# 888-777-4450



### **PBR-10 Portable Bumper Rack**

- 40" square
- 7 ft. high
- 5" swivel casters with locks.
- Holds 10 bumpers.



### **AS 24 Adjustable Step**

- Adjust 1 ft. or 2 ft. in height
- Weighs 12 lbs
- Width 24"
- Load capacity 600 lbs

**Rack/Stands/  
Carts**

### **PC-24 Parts Cart**

- Top Shelf 23" wide bottom is basket style
- 12" deep & 23" wide
- 5'-0" high, 4'-0" long. Moveable hooks on side
- Hanger brackets on each end
- For bumpers, hoods, etc..
- 4'-5" swivel casters with locks



### **PC 4 Parts Cart**

- Constructed of aluminum
- 3 shelves, 18" wide, 4 ft. long 5 ft. high
- Hooks on both ends and on one side for hanging doors, fenders etc.
- Ledge on one side for hoods, etc.
- 5" swivel casters with locks



## Innovative Truck Dolly

**The New Innovative Truck Dolly the first and only collapsible Truck Bed Stand with a LifeTime Warranty. Another Space saving solution to add to your Innovative collection.**



- Easy adjusts to fit any size truck bed
- Also holds panels and hoods
- Multiple adjustments for ideal working height
- Takes repairs, pep, painting and efficiencies to the next level
- Custom 8" total-lock, easy-glide wheels ensure zero movement when locked



- Handles loads up to 600 lbs.
- Durable powder coat finish withstands heat and rough handling
- Folds to a small footprint for space-saving storage
- 38" long x 44" wide
- Lifetime Warranty

**Rack/Stand/  
Carts**

## Innovative Wall Bumper Storage

- Support arms adjust in seconds, customizing for your storage needs
- Holds up to six large bumper covers
- Support arms fold down when not in use
- Heavy gauge steel construction holds big loads
- Durable powder coat finish stands up to rough handling



## Innovative Parts Cart-B Series

- Industry's easiest-nesting cart
- 30% more shelf positions than any other parts cart
- High-carbon, heat-treated steel shelf brackets for years of trouble-free use
- All shelves have upper side rails to prevent parts slide-off.
- Four industrial grade total-lock caster wheels for mobility; zero movement when locked

**44**

**888-777-4450**



## Ultra Rack

- Holds hoods, tailgates, doors, fenders, lift gates, deck lids and fenders
- Single-hand operation, for non-stop, smooth spray finishes
- Seven locking positions mimic the part's position on the vehicle for a seamless match
- Ability to rotate panel 90 degrees ensures proper paint coverage every time
- Complete system – no accessories needed
- Protective rubber boots keep critical areas overspray-free
- Four industrial grade total-lock caster wheels for stability, zero movement
- Durable powder coat finish withstands heat and rough handling
- Patent Pending



## Parts Cart C

- Easiest shelves in the industry to adjust
- Provides 32 sq. ft. of shelf space!
- High-carbon, heat-treated shelf brackets for years of trouble-free use.
- All shelves have upper side rails to prevent parts slide-off
- Durable powder coat finish stays new-looking longer
- Shown with optional RO Holder
- U.S. Patent #7,314,413
- Other Patent Pending



**Rack/Stands/  
Carts**

## Innovative SuperStand

- Holds any plastic bumper cover securely without touching the painted surface
- Makes prep, repairs, painting faster, easier; ensures quality results
- Ability to rotate cover 90 degrees ensures proper paint coverage every time
- Five locking positions for flexible use
- Four industrial grade total-lock caster wheels for stability, zero movement





### UD-800

- Automatic and manual cleaning at the same time
- Manual cleaning using feed-through brush, pump-driven (Circulated cleaner)
- Manual clear rinse for fresh solvent or fresh water base cleaner
- Filling-Station for fresh solvent or fresh water-base cleaner
- Powerful B-TEC exhausting system
- Automatic spray-gun cleaning with timer
- Includes automatic clear rinse
- Tightly closing air-flush system of paint guns during cleaning process
- Excellent cleaning results
- All features are individually adjustable
- Dimension: (W x L x H) 2.95 x 2.39 x 7.75 feet

### D-800

**Gun Washers/  
 Solvent Recyclers**

- Manual cleaning using feed-through brush, pump-driven (Circulated cleaner)
- Manual clear rinse for fresh solvent or fresh water base cleaner
- Filling-Station for fresh solvent or fresh water-base cleaner
- Powerful B-TEC exhausting system
- Automatic spray-gun cleaning with timer
- Includes automatic clear rinse
- Tightly closing air-flush system of paint guns during cleaning process
- Excellent cleaning results
- All features are individually adjustable



**46**

**888-777-4450**





**Universal Gun Cleaner  
 Starter-01 / manual + automatic**

- Durable construction for wall mounted
- For automatic and manual cleaning
- Powerful B-TEC exhaust system
- Manual cleaning using flow through brush and fresh dilution jet
- All machine parts are made of stainless steel
- For solvent or water
- Air tight closed air-flush system of paint guns during cleaning process
- Dimension: (W x L x H) 2.10 x 1.67 x 1.21 feet

**Speedbox**

- Use for waterborne or solvent based coatings
- For all disposable cups
- All features are fully adjustable
- Can be used inside or outside the spray booth
- Rapid color change using disposable cups – saves time
- Air exhaust system – no “blow back”, minimizes odor
- Over-spray containment “room” – minimizes over-spray sent to booth filters
- 18 gauge stainless steel - quality construction
- Top serves as a storage shelf – convenience
- Air gun with coil hose – saves time, effort
- Includes two 3-liter containers – convenience, saves money



**Gun Washers/  
 Solvent Recyclers**



**Coagulation Component  
 Part CS-300**

The professional coagulation station

## Painty- 01

Preparation and Mixing Table Mixing and Work-Table for Painters

- Provides organization at workplace
- Durable construction
- Working area made of stainless steel
- Draining facilities
- Large storage areas

Scope of supply:

- 4 x holders for spray guns
- 1 x holder for paper rolls
- Strong magnetic bar
- Dimension: (W x L x H) 3.87 x 2.02 x 4.65 feet



## Painty-02

Preparation and Mixing Table Stainless steel mixing and work-table with air-exhaust system

- All parts are made of stainless steel
- Adjustable air exhausting system
- Draining facilities
- Current edge protection
- Multiple storage shelves

Scope of supply:

- 4 x spray gun holder
- 1 x holder for paper rolls
- 1 x holder for garbage bag
- 1 x incl. air-coupling socket
- 1 x incl. exhaust air tube, flexible
- Dimension: (W x L x H) 3,87 x 2,02 x 4,65 feet

**Gun Washers/  
 Solvent Recyclers**



## Waterborne Spray Equipment Cleaning Made Easy with Becca's Patented Systems

- ENVIROWASH Waterborne Filtration System includes a 75 micron filter and a 25 micron filter
- Heat Package System (Patent Pending) for elevated temperature with variable control
- POWERCLEAN & POWERCLEAN PLUS– These patent pending features provide the use of compressed air to #1 protect the air passage ways of the spray gun and #2 accelerate the fluid action of the Wash Basin
- Advanced cleaning nozzle design (Patent Pending) Which enables you to clean difficult threaded areas

### Enviro 800



- Hands free pressurized automatic cleaning basin with 2 spray gun capacity
- Handheld solvent flow cleaning brush
- (2) Heavy duty diaphragm pneumatic pumps
- Pre-clean with "used" solvent and final rinse with "clean" solvent
- Spray out system

### Enviro 300

- Capacity to clean two (2) spray guns simultaneously
- Handheld solvent flow cleaning brush
- Heavy duty diaphragm pump
- Pre-clean with "used" solvent and final rinse with "clean" solvent
- Compact size makes it ideal for space-limited areas



**Gun Washers/  
Solvent Recyclers**

[www.CEGroup.com](http://www.CEGroup.com)

**49**

## Spectratherm 8000S



The 8000S has 8 1,000 watt infrared short wave lamps on 2 independently adjustable heads that provide the maximum 3,081 sq. in. (2m<sup>2</sup>) cure area. Cure area is uniform and focused with no hot or cold spots. Each array of 4 lamps may be adjusted to conform to the contour of the panel.

Both the Spectratherm 4000S and 8000S offer-

- Thermal Integrated Sensor System (TISS) allows for fast set up and automatic regulation
- Distance sensor emits audible tone for setting the proper distance from the panel. Heat sensor automatically adjusts the temperature throughout the curing process.
- Cures on any substrate. Cures body filler in 2 to 3 minutes, top coat in 7 to 10 minutes.
- Modulated ramp-up time for maximum control and heat transfer.
- Auto Timed Shut-Off: Reduces chance of damage to finish due to overheating
- Heavy duty stand with movable arm and a locking caster allows the lamp head to be positioned to panels from the rocker to the vehicle roof.

(Note: Appropriate 220 volt plug must be installed by user.)

Paint Curing

## Spectratherm 4000S

The 4000S has an adjustable array of 4 1,000 watt infrared short wave lamps conforms to the contour of the panel and gives a uniform, focused 1,521 sq. in. (1m<sup>2</sup>) cure area with no hot or cold spots




50

**888-777-4450**



## Make Drying Waterborne Paint a Breeze

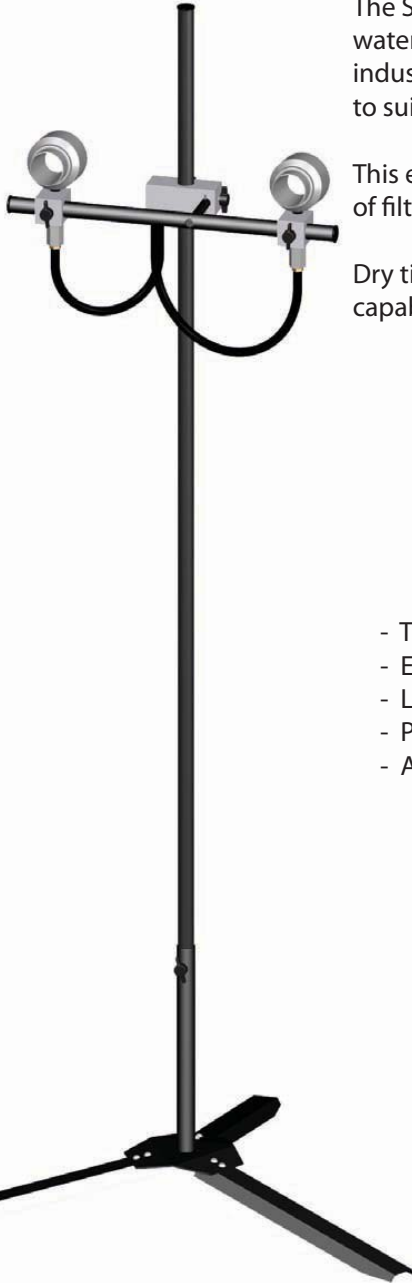

The Spectra-Jet has been specifically designed to rapidly dry the waterborne basecoats that are now being used in the automotive refinish industry. Spectra-Jet can be used in both vertical and horizontal positions to suit your drying needs.

This equipment harnesses the venturi principal resulting in a large volume of filtered spray-booth air being pushed across the painted panels.

Dry times as short as 5 minutes can be achieved. One 2 head unit is capable of drying a large area, i.e. the whole side of a vehicle.

- Tried and Tested Performance
- Easy Head Positioning
- Light Yet Robust Stand
- Patent (pending) Design
- Available in a Hand Held Model


**Paint Curing**



[www.CEGroup.com](http://www.CEGroup.com)

**51**

## SpeedDri System

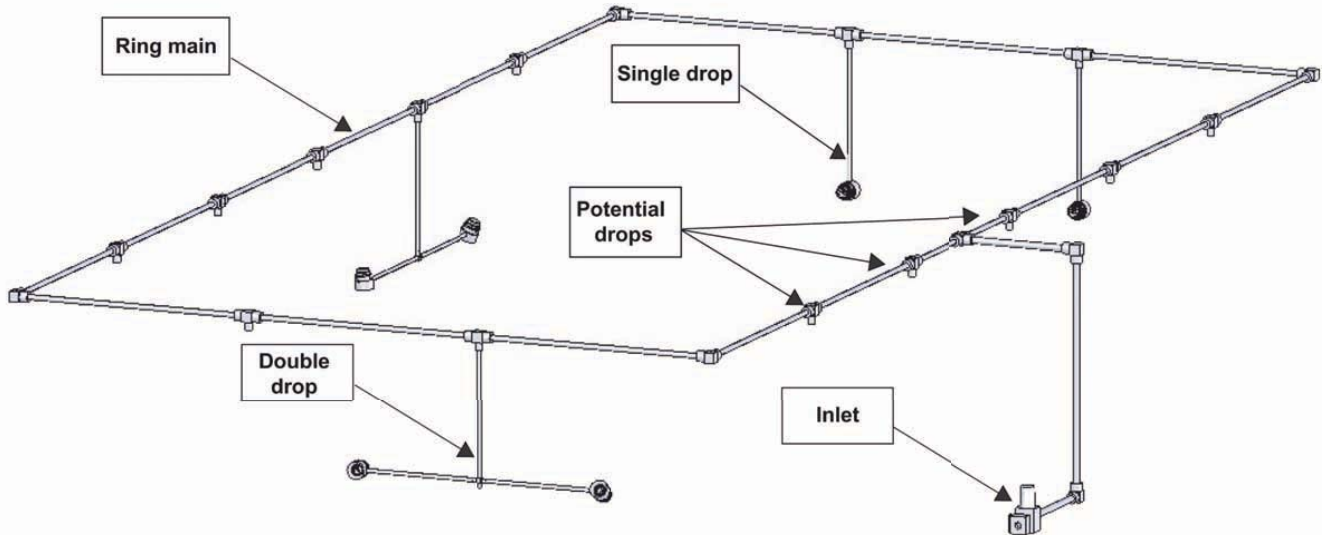

### Paint Curing

The Meech SpeedDri System is a discrete in-booth installation. Mounted above the ceiling and filters, the modular arrangement allows an almost limitless set-up. Running solely from compressed air, and containing no moving parts, the Meech SpeedDri System requires very little maintenance.

The Meech SpeedDri System combines the practicality, performance and clutter-free installation of much more expensive in-booth arrangements, with the versatility and cost comparable to that of hand-held/stand-based solutions.

A Meech SpeedDri system offers the following benefits

- No pipes along the floor of the booth
- No floor standing units to position or store
- 14 drop points allow the Air Amplifiers to be positioned virtually anywhere in the booth
- 6 fully adjustable Air Amplifiers, which when combined with the regulator, provide a range of airflow and speed adjustment
- Memory based flexible trunking allows the angle of the Air Amplifier to be adjusted
- Single and double drops increase flexibility
- Unique bayonet fitting allows easy connection and removal of drops
- Push-fit connection system reduces installation time, and booth downtime
- No moving parts, therefore minimal maintenance required


**52**

**888-777-4450**

Fitting a Meech SpeedDri System will allow your company to

1. Reduce drying time for all waterborne paint jobs
2. Increase throughput
3. Increase the profitability of your company

### Double Air Amplifier Drop

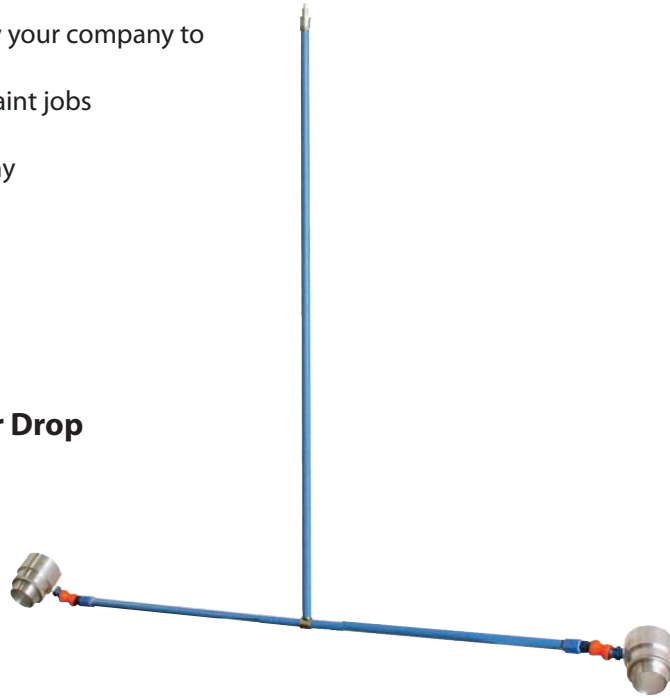

### Single Air Amplifier Drop



Paint Curing

Two Knuckle Joints allow for range of adjustments



[www.CEGGroup.com](http://www.CEGGroup.com)

53



The 400 Series Rear Access product is an ideal paint spray booth product when a rear access fixture is desired. The 400 Series is also a Vapor proof product with an ETL listing of Class I Division 2 rating. This series now has 2' fixture as well as the 4' fixture cataloged. The 4' fixture comes in 2, 4 & 6 lamp T8 32W, T8HO 44W, & T5HO 54W lamps. The 2' - 3 lamp fixture uses (3) T8 17W lamps.



### Paint Booth Accessories

The Slim Light Series features a 20 Ga. baked white enamel steel housing that is only 2 1/4" thick maximizing the available space allowed for your paint spray booth. The Slim Light Series is available in lengths of 3 & 4' with 2, 4 or 6 lamp options.

The 3' fixtures are available with T8 lamps. The 4' fixtures are available with T5HO or T8 lamps. This series provides front door frame access with a paint spray cutoff switch when opened. ETL listed in the U.S. and Canada, the Slim Light Series has multiple listings for inside access and wet locations. Must be mounted hinge side up.




**54**

**888-777-4450**





## EAGLE Paint & Ink Safety Cabinets

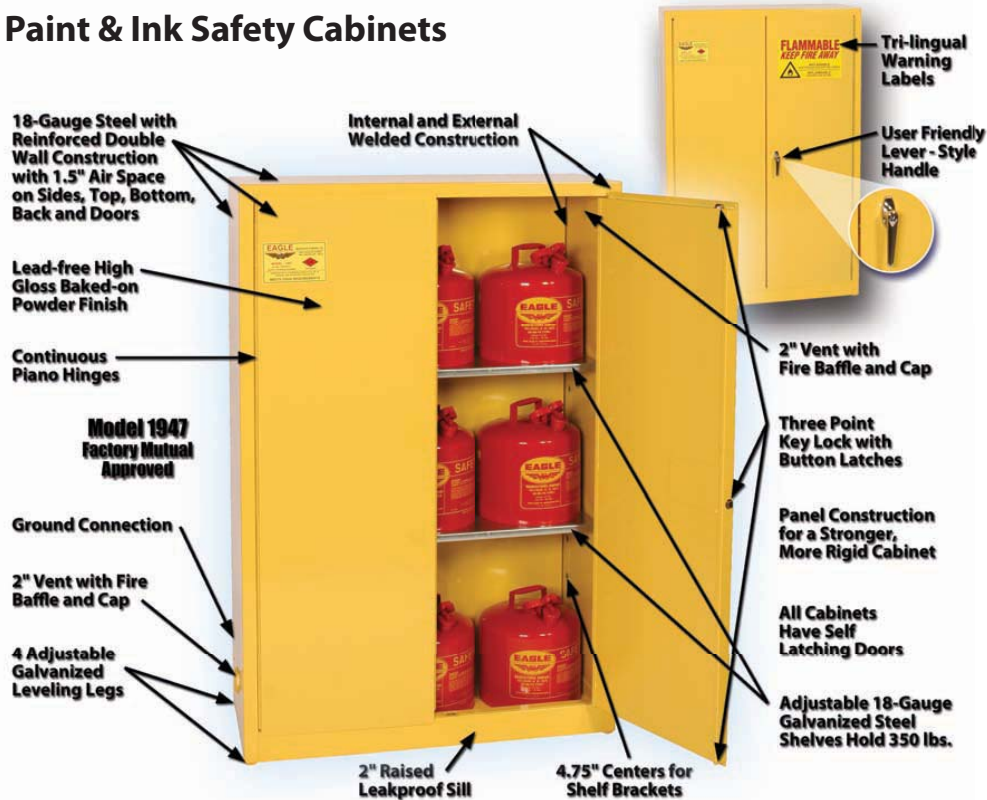

FM approved cabinets for safely and securely storing and organizing paint and ink cans. These cabinets include all the features of other Eagle cabinets and are available in red and yellow with additional shelves to maximize storage space. Capacity is based on the number of 1 gallon paint containers the cabinet will hold.

- Galvanized steel shelves, adjustable on 4.75" centers, support 350 pounds.
- Galvanized steel leveling legs
- Internal and external welded 18 gauge steel double wall panel construction with 1.5" air space
- 2" raised leakproof sill
- 2" vent with fire baffle and cap
- Ground connection

New 30 Gallon models are designed to store 30 - 1 gallon paint cans or 252 - 12oz. aerosol cans. Available in red and yellow finishes with manual or self-closing doors.



**Storage/  
Work Stations**

**[www.CEGroup.com](http://www.CEGroup.com)**

**55**



## Refrigerant Management System Series 37880



The YELLOW JACKET® Refrigerant Management System (RMS) 37880, which offers many of the same features of the RMS 39800, but with SAE J2788 approval.

With the press of one button, you get full cycle recover/recycle/evacuate/recharge to bring the vehicle back to factory spec. The other buttons give you the flexibility and efficiency for specific A/C services.

NEW RMS 37880 includes the best features of the RMS 39800 Series

- High-side or low-side charging
- Fully automatic air purging constantly monitors and purges non-condensables
- Fast tank refills with no hose changes
- Refrigerant management system that keeps track of information on A/C service work
- 50-pound storage tank - 20 pounds greater than most competitive units.
- Single-pass filtering system
- Automatic shut-off for full tank and high pressure
- Heavy duty shock resistant scale for accurate charging
- Two-stage, 3/5 cfm vacuum pump for fast, high-efficiency evacuation
- Performs SAE J2788 service
- Built-in self diagnostics



Service  
Equipment

Recovery tank 50 lbs.  
W x D x H 19.5 x 29 x 45"  
Weight 219 lbs.  
Compressor 1/2 hp hermetic  
Vacuum pump 2-stage 3 cfm  
Hoses 10 foot  
Air purge Automatic  
Hour meter Yes

56

888-777-4450



## Coolant Exchange System 37505

Service more cars in the same amount of time with the YELLOWJACKET® Coolant Exchange/Flush System 37505. Super capacity of the “new” and “used” coolant tanks means you use less time for refilling and disposal. And with super fast vacuum/fill/exchange, you are ready to move on to the next service job in moments.

### At the top in capacity...

Three 8-gallon “new coolant” tanks hold up to three different coolants (Dexcool, ethylene glycol, import, etc.) to service a wide variety of vehicles from one machine. And up to 50% more new coolant on board means you can fill more vehicles from one source.

- Unique exchange process eliminates pressurizing the tanks and the resulting stress on fittings and connections that causes leaks
- Use with hot or cold vehicle
- On board dual diaphragm pump rapidly empties used coolant tank and quickly siphons coolant from bulk drums, saving the time and work of pumping and filling by hand



Dimensions 45" h x 19.5" w x 29" deep  
Weight 118 lbs. (empty)  
New coolant capacity 24 gallons with 8 gallons per tank  
Used coolant capacity 16 gallons in one tank  
Power Shop air  
Pump Dual diaphragm  
Max pump pressure 100 psi max (adjustable)  
Max fluid flow 5 GPM  
Vacuum 25" Hg  
Average vacuum/fill time 5 minutes  
Removable hoses 10' clear with wire reinforcement  
Vacuum/Fill/Flush temperature Hot or cold vehicle  
Flush Continuous  
Coolant types All  
Accessories Cross flow adapter, radiator cone, two sizes of drain probes and radiator cap adapters

Service  
Equipment

[www.CEGroup.com](http://www.CEGroup.com)

57

## Reciprocating Air Compressors

The Champion Advantage Series is the newest thinking in delivering fully equipped reciprocating compressors from the recognized leader in compressed air equipment.

These reciprocating compressors get to you with the pedal-to-the-metal speed—they're on their way, shipped direct., within 24 hours of your order. It's one of the fastest turnaround times in the industry.



### Advantage Series

- Available in 5-25 HP
- Single and Three Phase Electrics
- Standard Options
  - Mounted Starter
  - Vibration Isolators
  - Air Cooled Aftercooler (except 5 HP)
  - Automatic Tank Drain
  - Low Oil Monitor
  - Dual Control (10 HP and above)
  - 5 year Warranty on Electric Motor
  - 5 year Warranty on ASME Coded Receiver
  - 5 year Prorated Warranty on Compressor Pump



Compressed  
Air

### Portable Gas Driven Compressors

- HGR6-3K
- 12.5 HP Kohler Electric Start Engine
- 30 Gallon ASME Coded Receiver with Vibration Isolators
- Two-Stage Splash Lubricated Compressor Pump
- 23.2 Delivered CFM at 175 PSI
- 5 Year Prorated Warranty on Compressor Pump

58

888-777-4450



## Reciprocating Air Compressors

### "R" Series Duplex Compressors

- 2-30 HP Electric Driven
- 2 Pumps and 2 Motors Mounted on One Receiver
- Two-Stage Splash Lubricated Compressor Pumps
- ASME Coded Receivers with Manual Drain



### Refrigerated Air Dryers

- Fabricated from solid steel, the corrosion resistant epoxy powder coated paint foretell the quality to be found within.
- Intelligence Controller Package
- Combination Separator/Filter
- Heat Exchanger
- 2 Year Warranty on Complete Dryer and Lifetime on Heat Exchanger



Compressed  
Air



**CEG'S COMPRESSED  
AIR DRYING SOLUTIONS!**  
**Call for your Compressed Air Survey**



**EH-4000 Application Dryer**

- Good for Waterborne Finishes
- Desiccant Dryer Provides Clean Dry Air
- Where You Paint & Prime
- Pre-Filter includes Patented "Inverse Flow™" Filter
- Activated Carbon Bed Prevents Oil Migration
- Spin-On/Spin-Off Elements for Rapid Maintenance

**PERF-25 / PERF-50 SYSTEM Paint Air System**

- Best Waterborne Approved Product
  - Continuous -40° Air to Paint Booth
  - Increases Shop Throughput
  - Reduces Cure Time
  - Provided with 0.01 micron filter
- PERF-25 One Gun, PERF-50 Two Guns



**STEALTH 6060 Filter / Coalscer**

- Water, Oil & Dirt Filter
- Activated carbon Pre-filter
- 0.01 micron Oil Removal 2nd Stage
- 3/8" Regulator with Gauge
- Clamp Ring Design Allow Easy Service

**STEALTH 6950 Water Trap / Tool Saver**

- Inverse Flow Control Unit
- Stainless Steel and Cotton Filter Design
- Clamp Ring Design Allows Rapid Maintenance
- 1/4" Regulated Outlet



**Compressed  
Air**

**60**

**888-777-4450**



**CEG'S COMPRESSED  
AIR DRYING SOLUTIONS!**  
**Call for your Compressed Air Survey**

**MR-1 Mini Paint Gun Regulator**

- Precise Air Regulation at Gun
- 0-60 Pressure Range Provides Excellent Control
- Snap Lock Design with Full Diaphragm
- Lightweight



**ED 2-4 Electronic Drain**

- Programmable Tank Drain
- 1/4" or 1/2" Inlet
- Straining Ball Valve Included
- Manual Override Feature



**D500 Repair Kit After Market Repair Kit**

- Rebuilding Kit for DAD Style Dryers
- Includes Pre-Filter and Coalescing Element
- Sight Glass Included
- Activated Alumina Beads



**T10 Repair Kit After Market Repair Kit**

- Rebuilding Kit for TS Style Dryers
- Activated Alumina Beads
- Sight Glass Included



**[www.CEGGroup.com](http://www.CEGGroup.com)**

**61**



*Go to [CEGroup.com](http://CEGroup.com) for*

- Purchasing Products
- Industry News
- Support
- Training
- Product Videos
- and much more...

We feature more than 20,000  
products from over 30 different lines



*Leading the Way.  
Easy Ordering Through the Internet.*

*[www.CEGroup.com](http://www.CEGroup.com)*